



CBP10

Made in Taiwan


Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~28P
Pitch (terminal to terminal)	10mm




CBP10-01

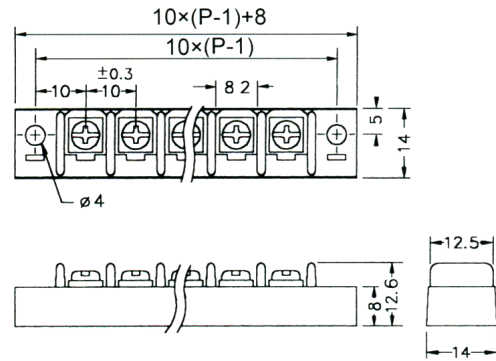


Unit : mm

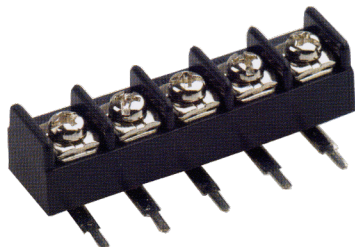


CBP10-02

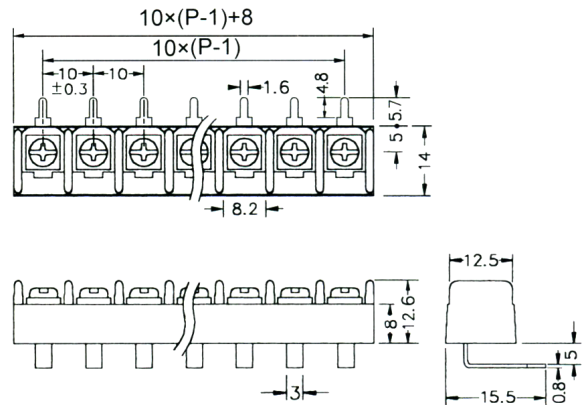


Unit : mm

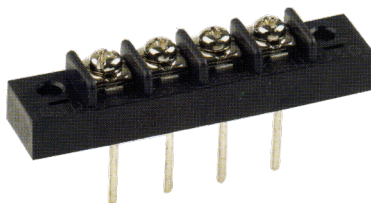


CBP10-03

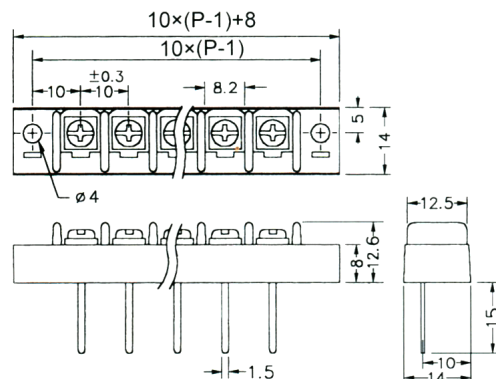






CBP10-04

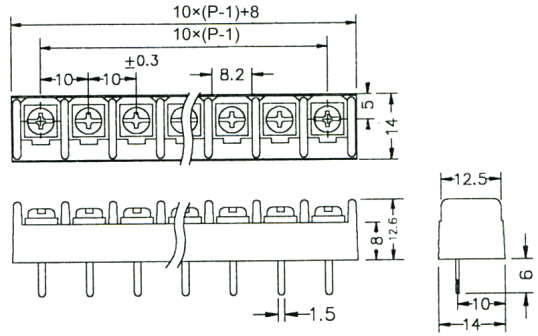


Unit : mm

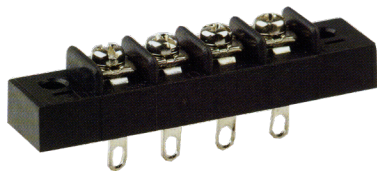


CBP10-05

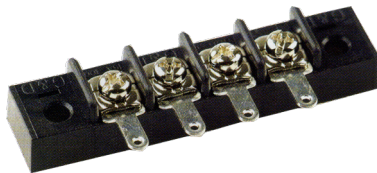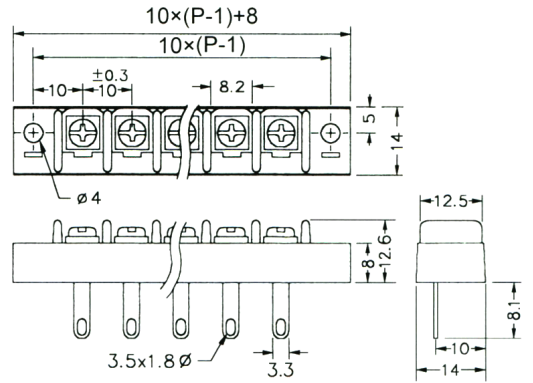


CBP10-07

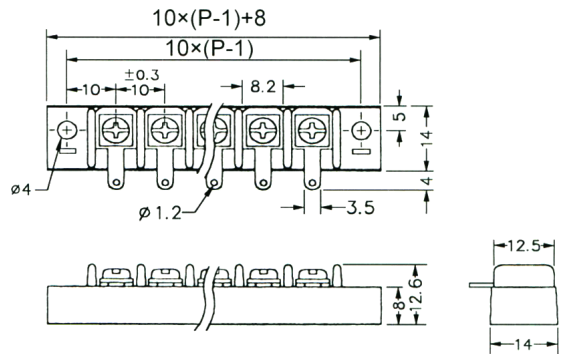

Unit : mm

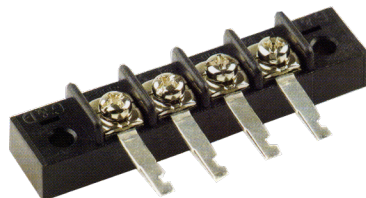

CBP10-08

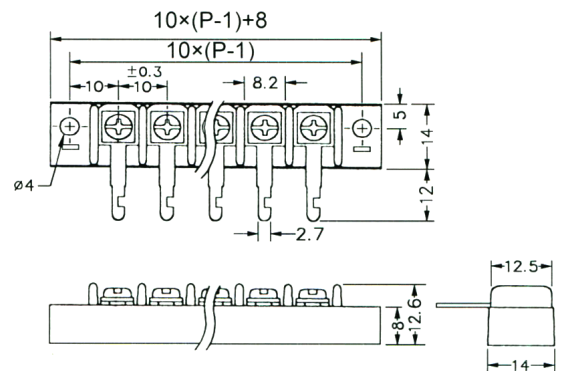

CBP20

Cover Available



Made in Taiwan

Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3.5, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	12Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	9.5mm


Unit : mm




CBP20-01

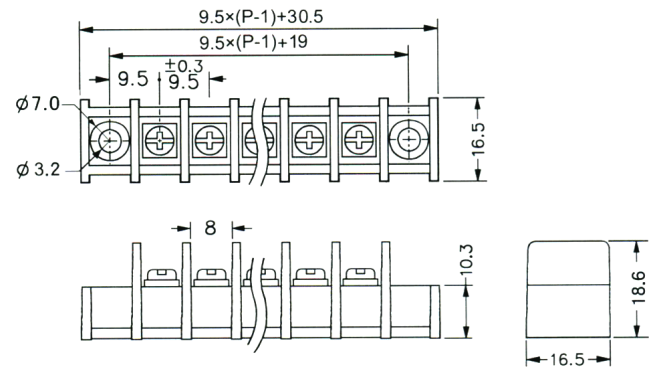


CBP20-02

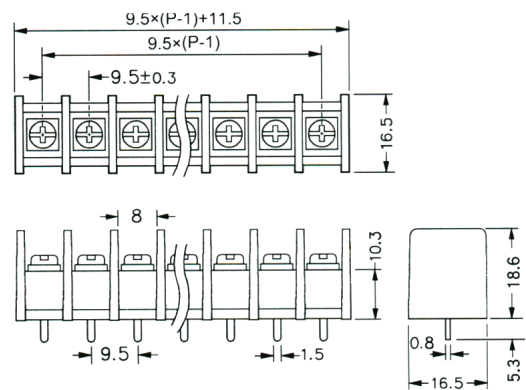


Unit : mm




CBP20-03

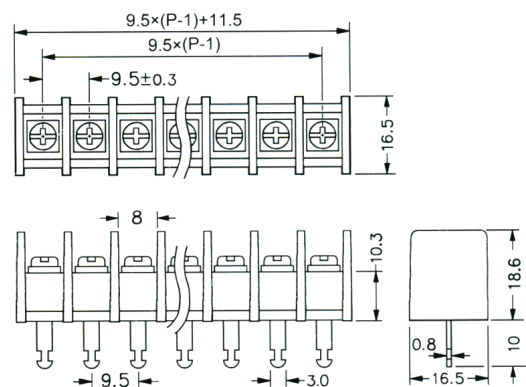






CBP20-04

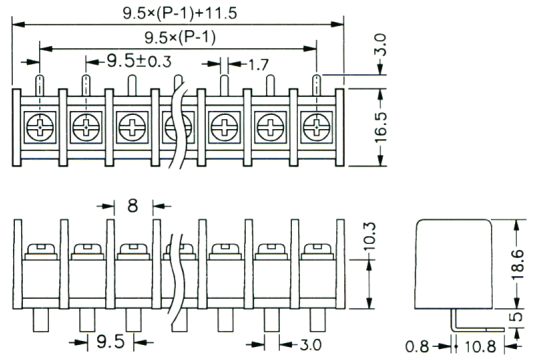


Unit : mm




CBP20-05

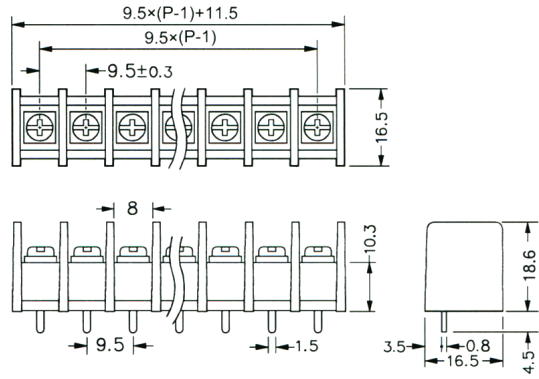


CBP20-06

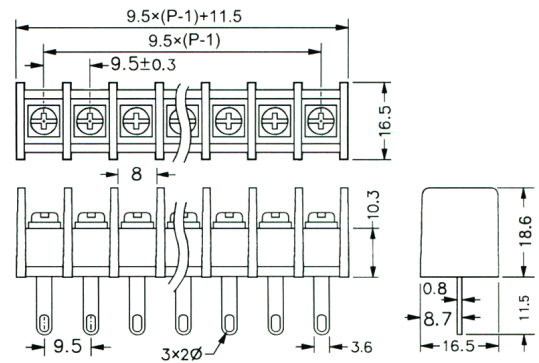

Unit : mm



CBP20-07

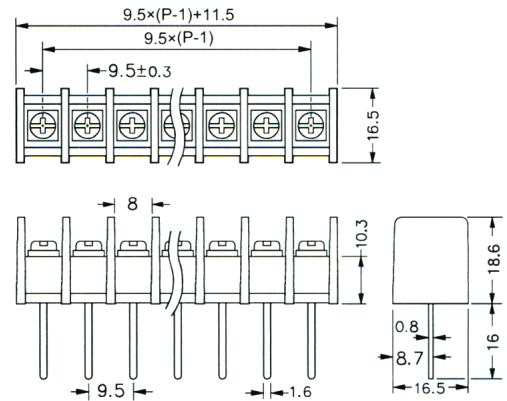

CBP30




Cover Available

Made in Taiwan


Electrical Rating	30A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M4, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	18Kg/cm
Number of Poles	2P~29P
Pitch (terminal to terminal)	11mm






CBP30-01

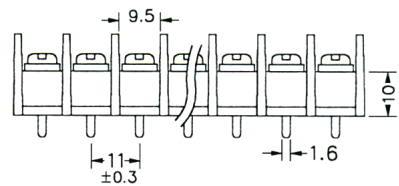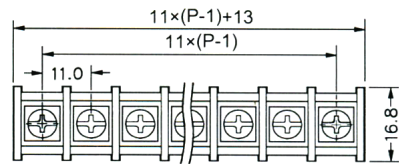


Unit : mm






CBP30-01

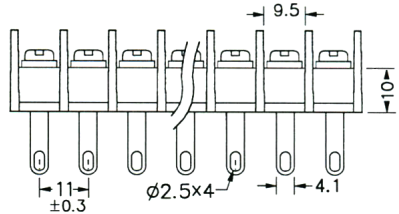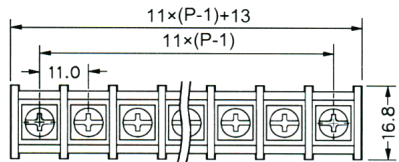


Unit : mm

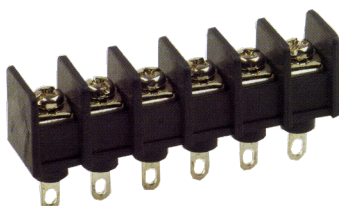


CBP30-01

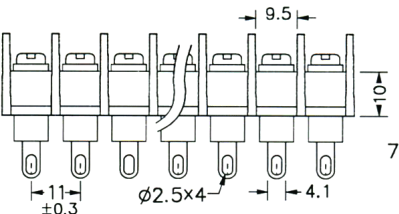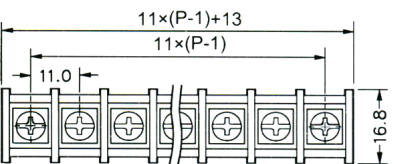





CBP30-04

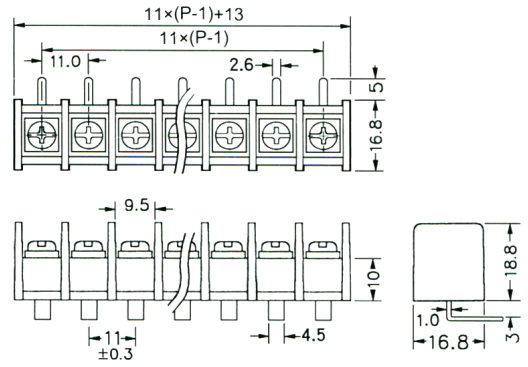

Unit : mm



CBP30-05


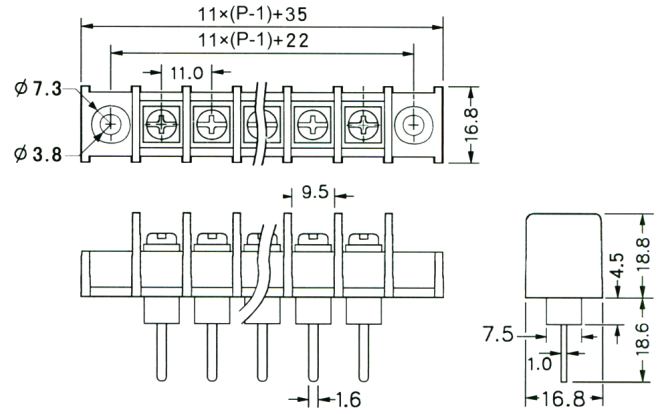


CBP40


Cover Available

Made in Taiwan


Electrical Rating	20A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3.5, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	12Kg/cm
Number of Poles	2P~30P
Pitch (terminal to terminal)	10mm

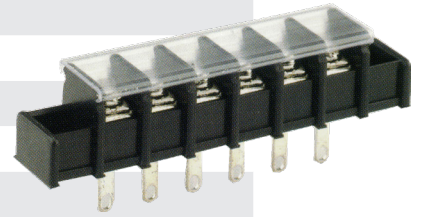


CBP40-01

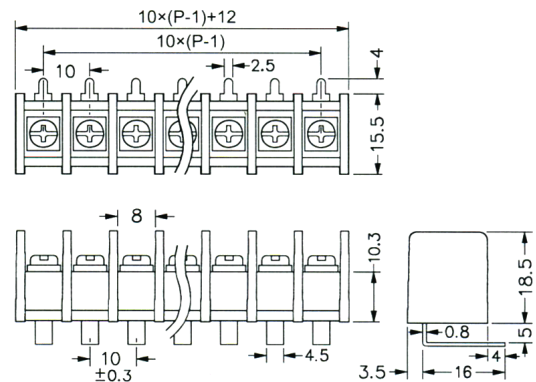


CBP40-02

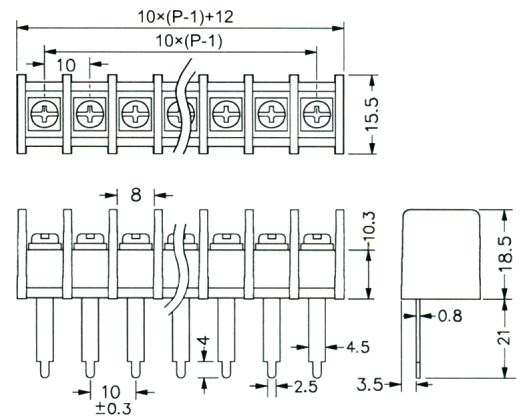


CBP40-03

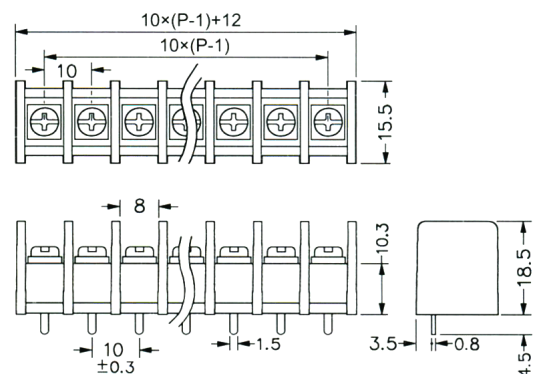





CBP40-04

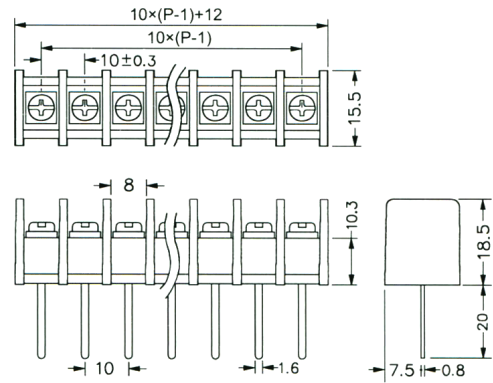


Unit : mm




CBP40-05

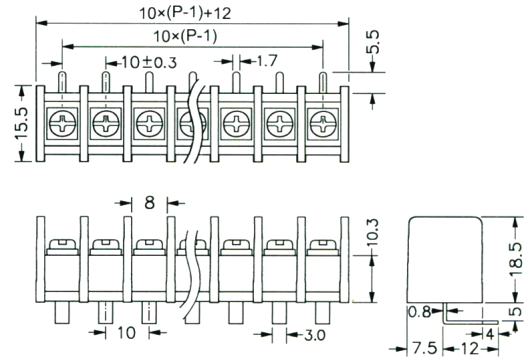

Unit : mm




CBP40-06

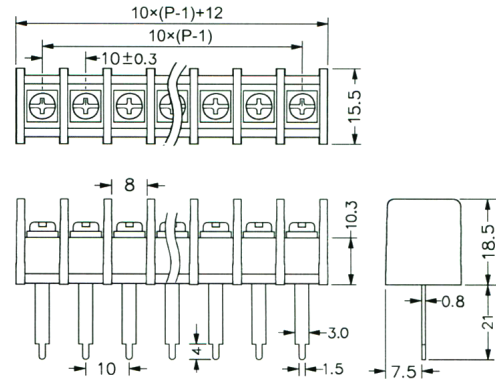


Unit : mm




CBP40-07

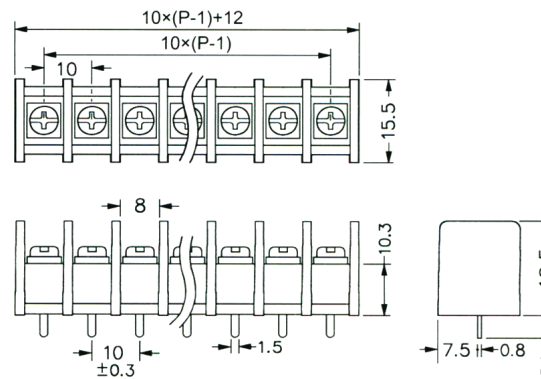

Unit : mm

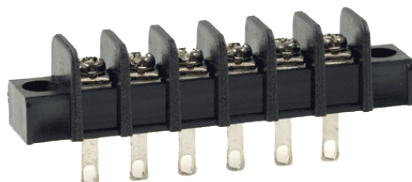

CBP40-08

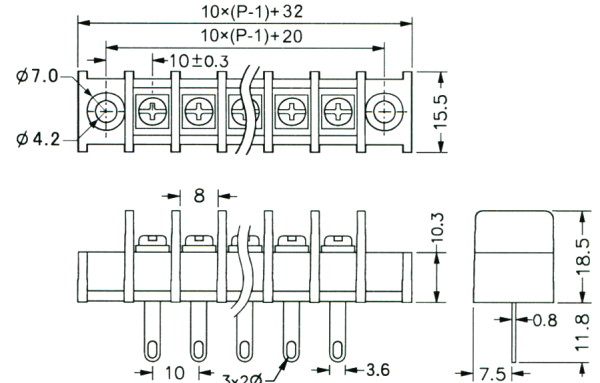


Unit : mm


CBP60

Made in Taiwan


Electrical Rating	10A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	6.35mm




CBP60-01

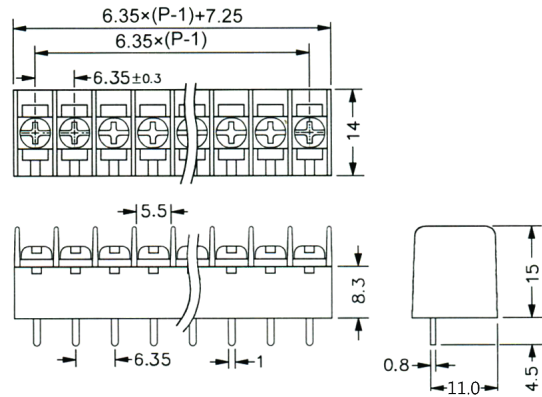

Unit : mm



CBP60-02


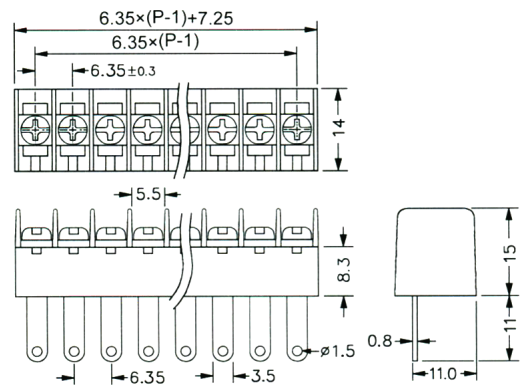


CBP70



Cover Available

Made in Taiwan



Electrical Rating	10A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	7.62mm

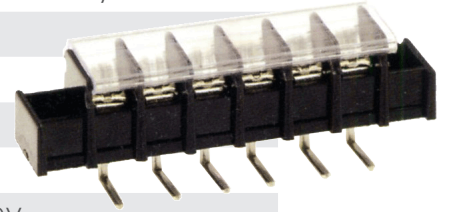


CBP70-01

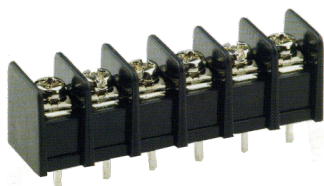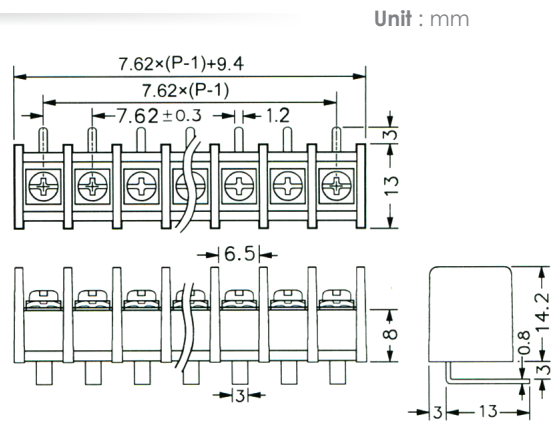


CBP70-02

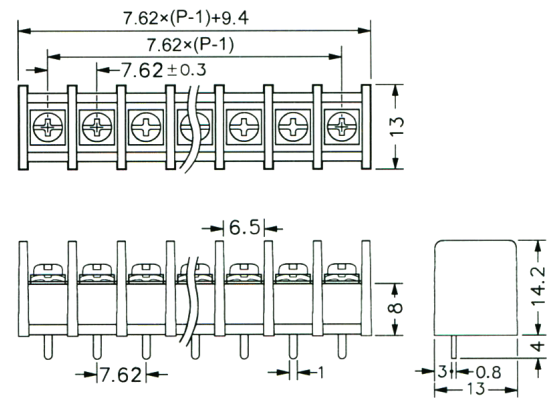


CBP70-03

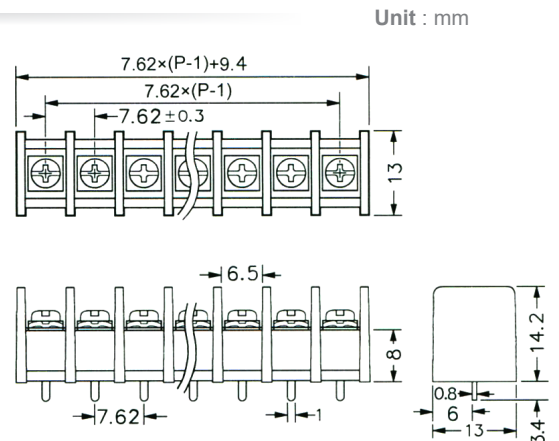





CBP70-04A

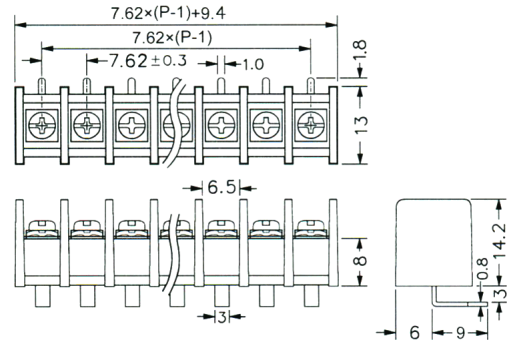


Unit : mm




CBP70-04B

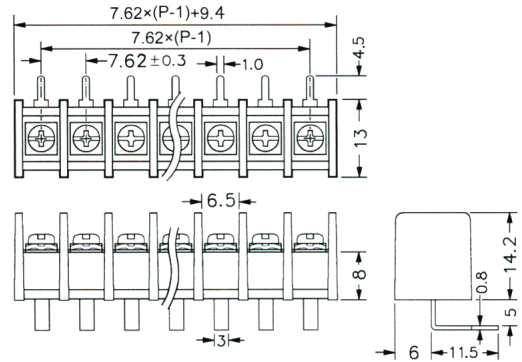


Unit : mm




CBP70-05

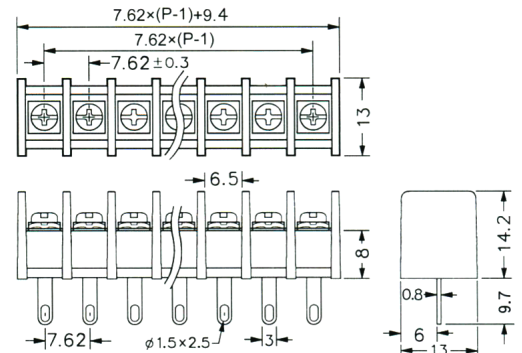


Unit : mm




CBP70-06

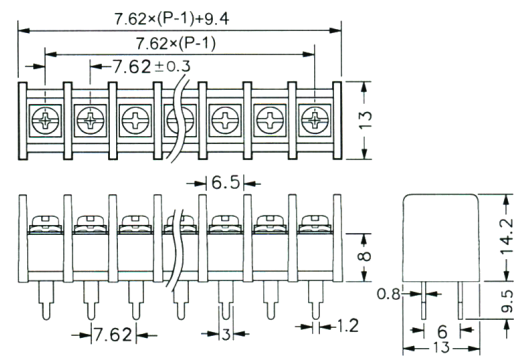

Unit : mm



CBP70-07

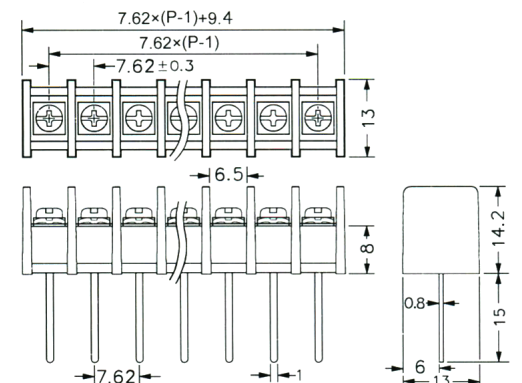


Unit : mm


CBP100

Made in Taiwan



Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	8.25mm

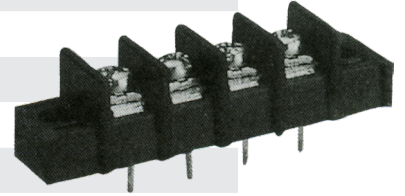


Unit : mm




CBP100-01

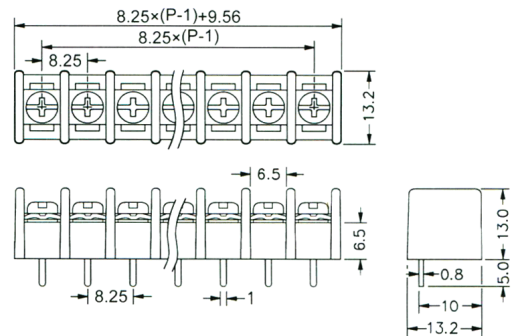


CBP100-02

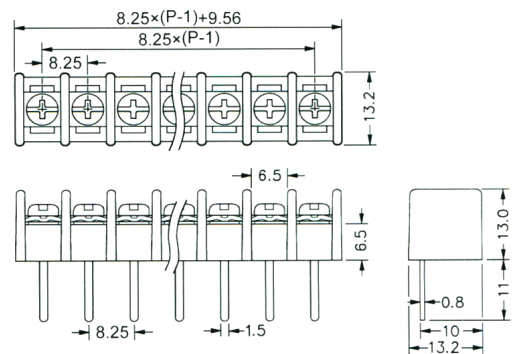

Unit : mm

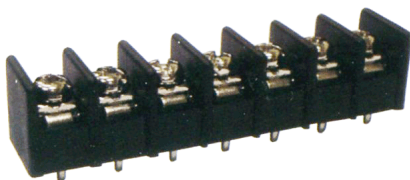

CBP100-03


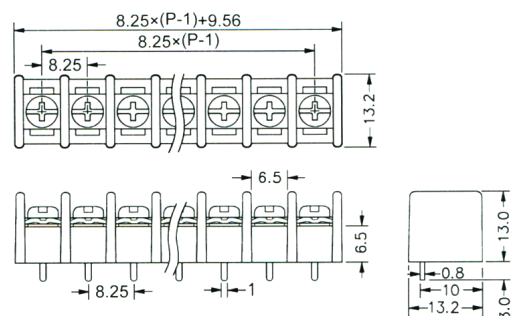


CBP210




Cover Available

Made in Taiwan


Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	10mm






CBP210-01

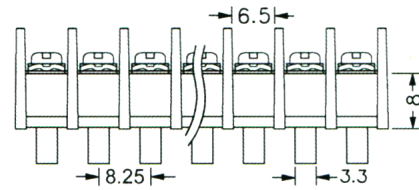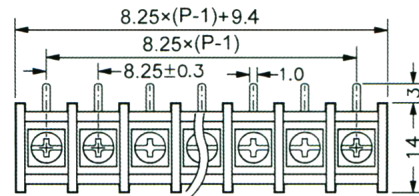


Unit : mm

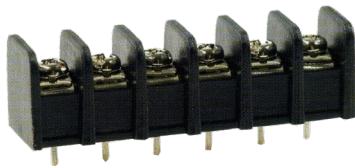




CBP210-02

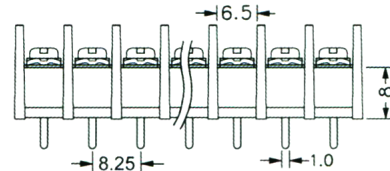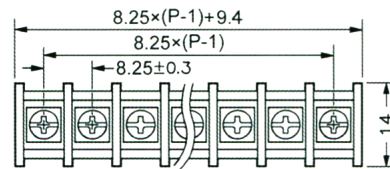


Unit : mm




CBP210-03

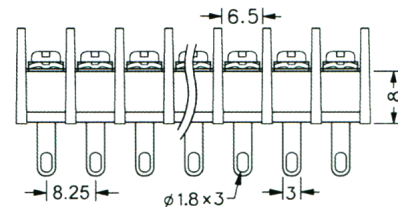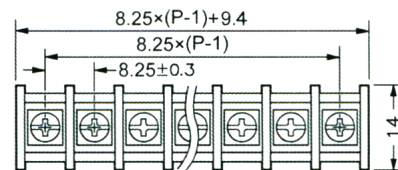





CBP210-04

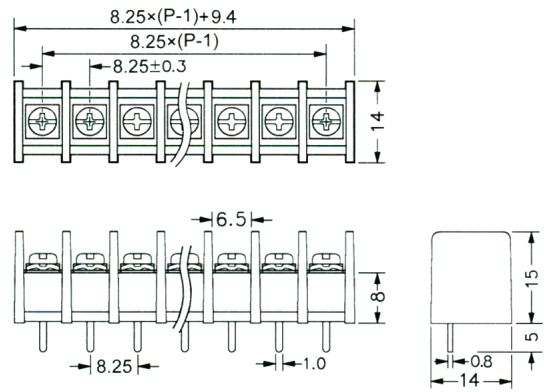

Unit : mm



CBP210-05

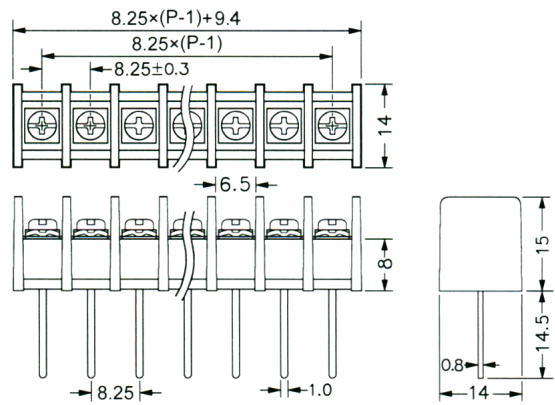


CBP50



Made in Taiwan

Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M4, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	18Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	11mm


Unit : mm

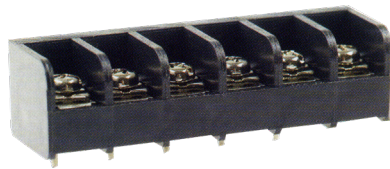


CBP50-01

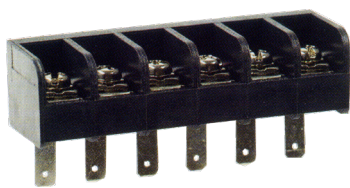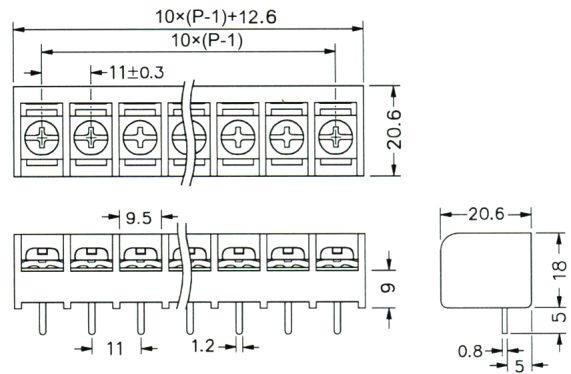


CBP50-02

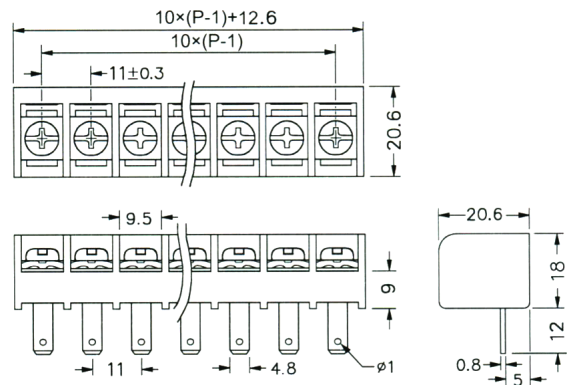


Unit : mm




CBP50-03

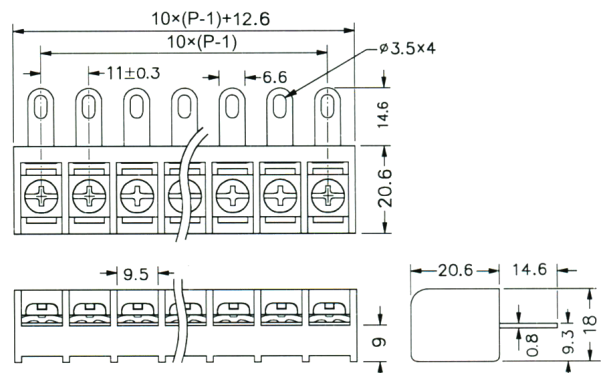





CBP50-04

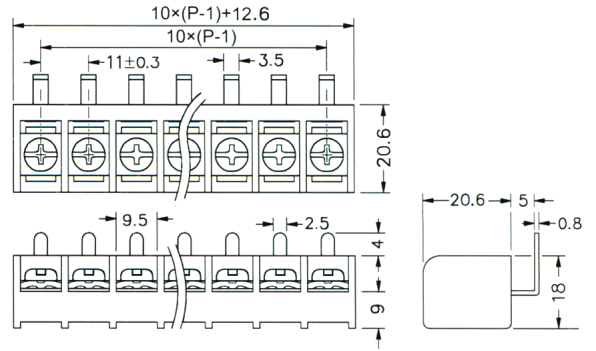

Unit : mm



CBP50-05

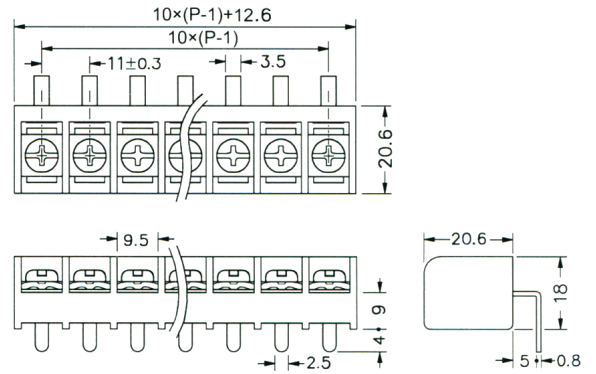



CBP80

Made in Taiwan



Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	8.25mm




CBP80-01

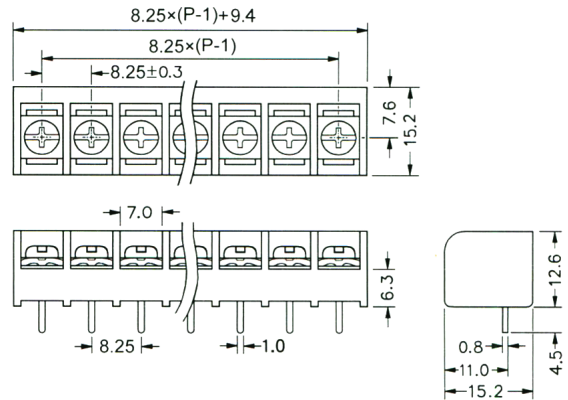

CBP80-02

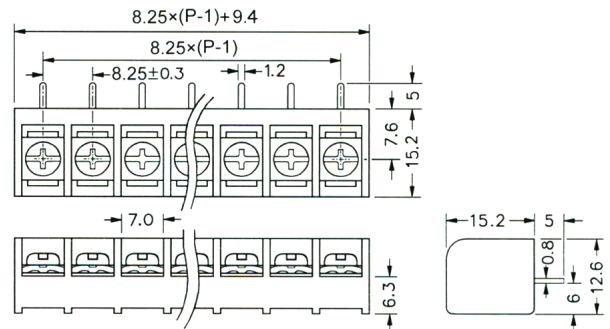


CBP80-03

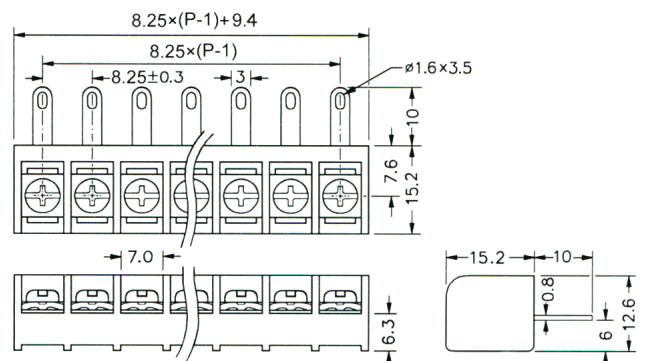


Unit : mm


Unit : mm




CBP80-04

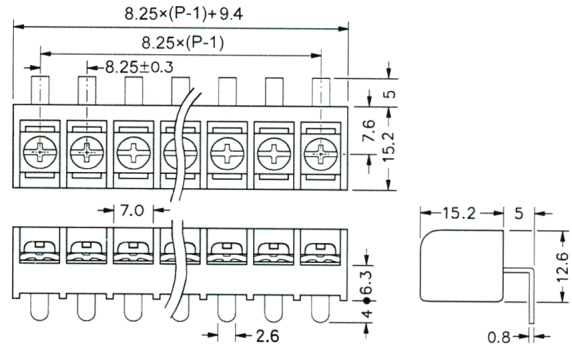

Unit : mm




CBP80-05

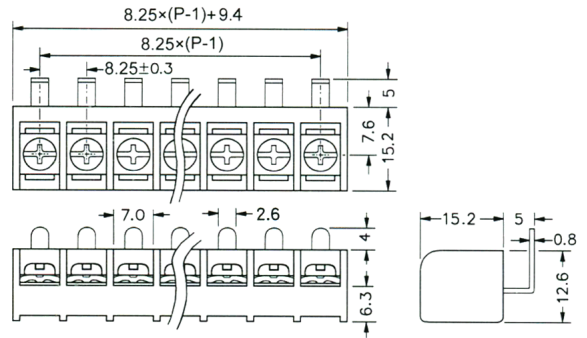




CBP90

Made in Taiwan


Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3.5, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	12Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	9.5mm






CBP90-01

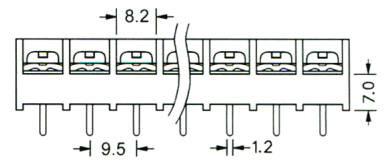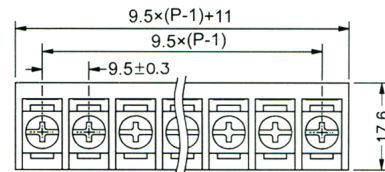


Unit : mm






CBP90-02

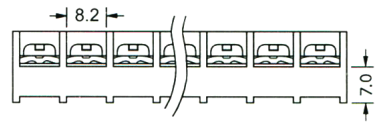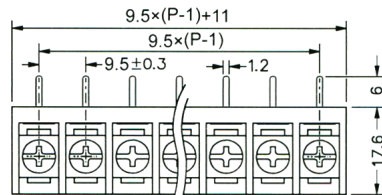

Unit : mm




CBP90-03

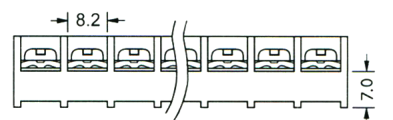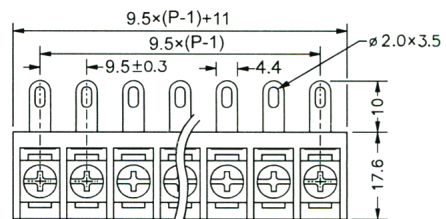






CBP90-04

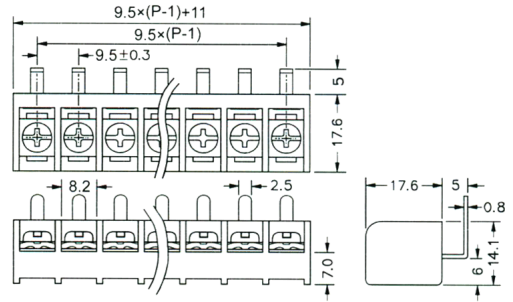


Unit : mm




CBP90-05

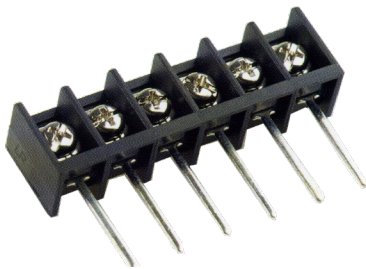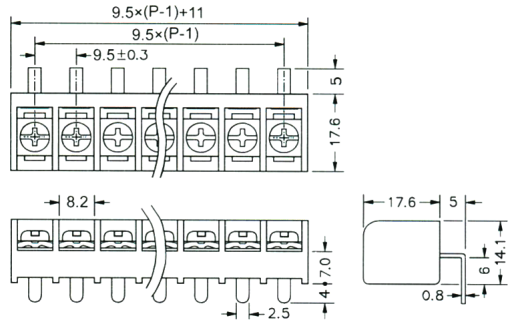


CBP90-06

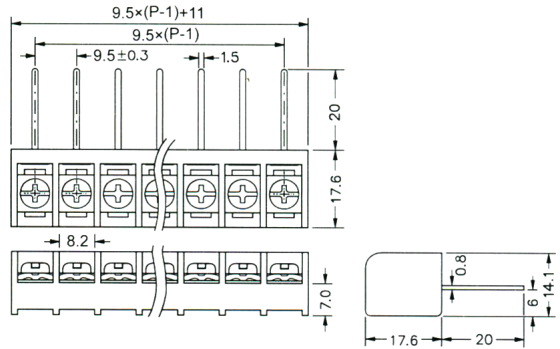


Unit : mm




CBP90-07

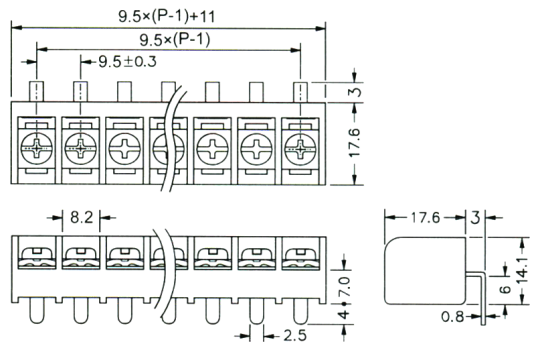

Unit : mm




CBP90-08

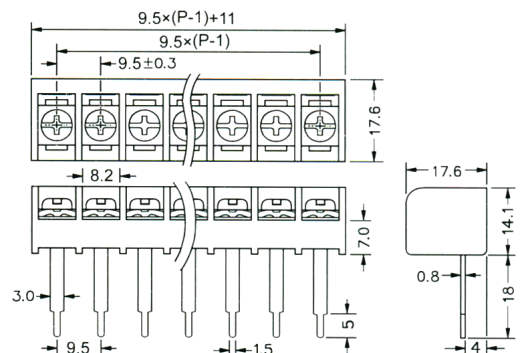


CBP140

Made in Taiwan



Electrical Rating	10A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	6.35mm





CBP140-01




Unit : mm

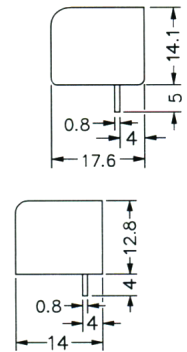



CBP140-02




Unit : mm




CBP140-03

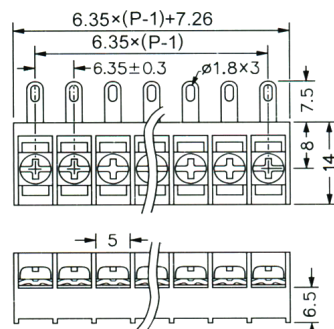



CBP140-04

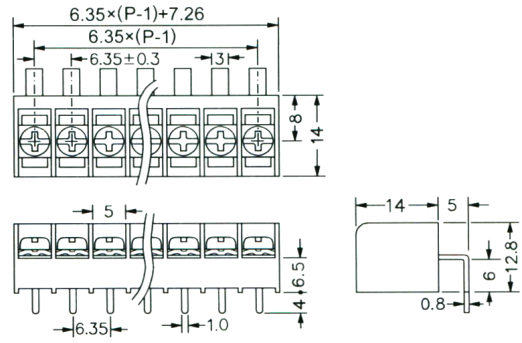


Unit : mm


CBP110

Made in Taiwan


Electrical Rating	15A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2x2P~2x26P
Pitch (terminal to terminal)	8.25mm




CBP110-01

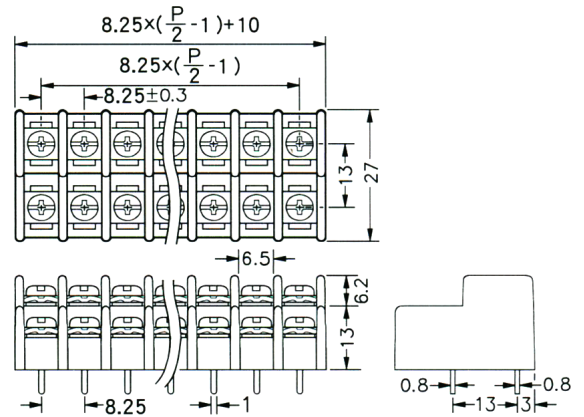

Unit : mm

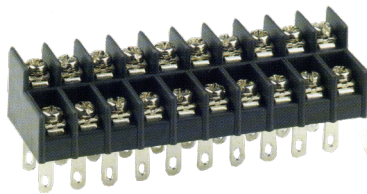

CBP110-02

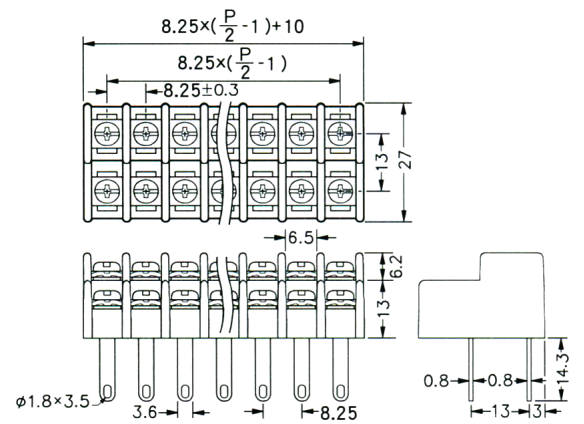


CBP120


Cover Available

Made in Taiwan


Electrical Rating	15A 300VAC
Housing Material	PBT, Black
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +130°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~14 AWG
Max. Torque Value	8Kg/cm
Number of Poles	2x2P~2x30P
Pitch (terminal to terminal)	7.62mm

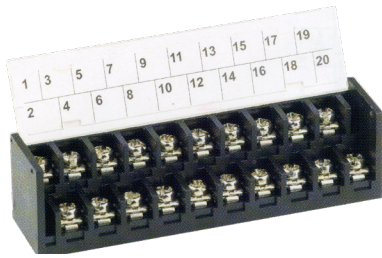


CBP120-01

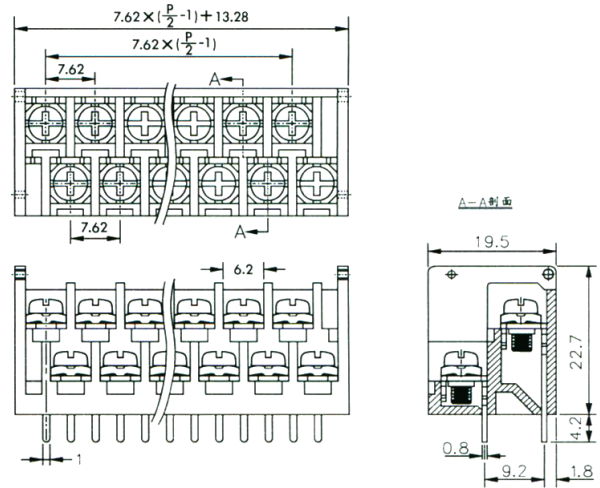

Unit : mm

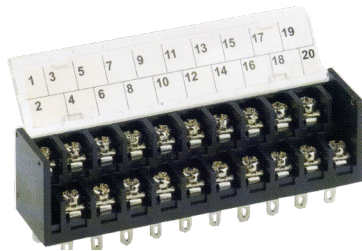

CBP120-02

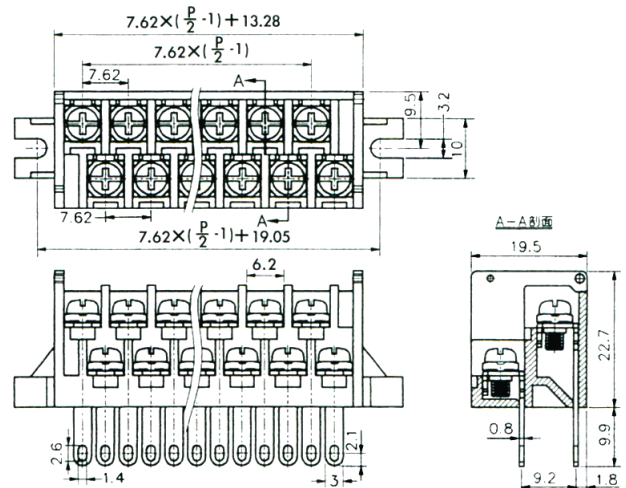


CBP1-381



Made in Taiwan

Electrical Rating	10A 300VAC
Housing Material	Polyamide 66, Green
Contact	Phosphor Bronze, 0.3t, Nickel Plated
Screw	M2.0, Steel, Zinc Plated
Cage clamp	Brass, 0.7t, Nickel Plated
Solder Pin	0.8mm Brass, Tin Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	26~16 AWG
Max. Torque Value	3kg/cm
Number of Poles	2P~16P
Pitch (terminal to terminal)	3.81mm


Unit : mm

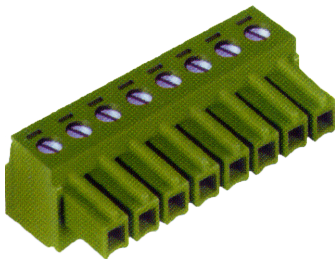


CBP1-381K

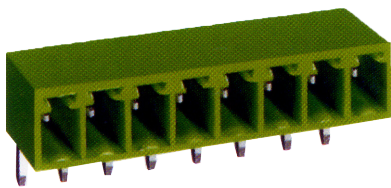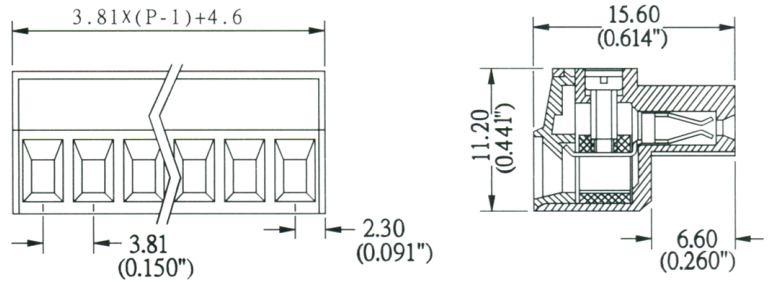


CBP1-381R

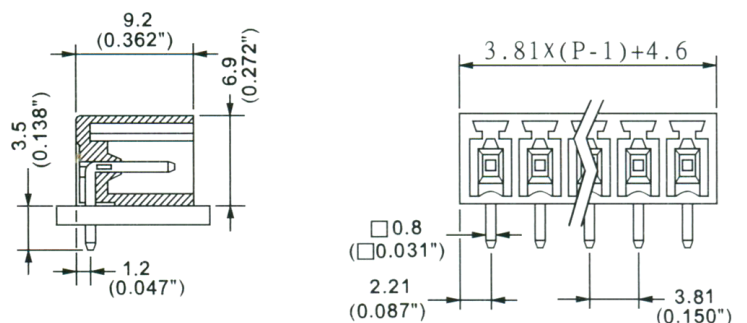


Unit : mm

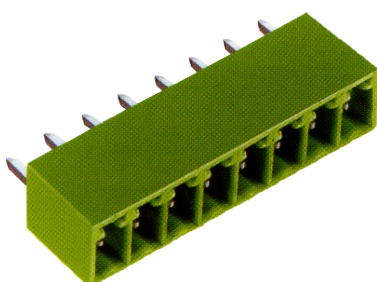


CBP1-381V




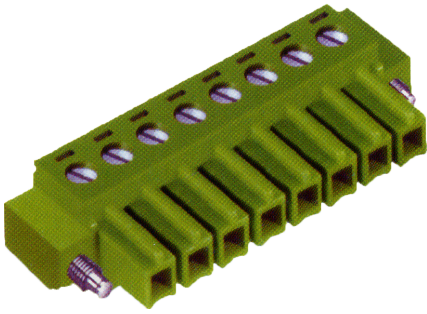


CBP1-381AK

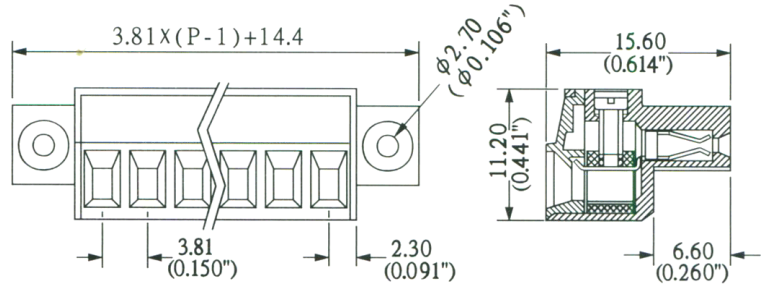


Unit : mm

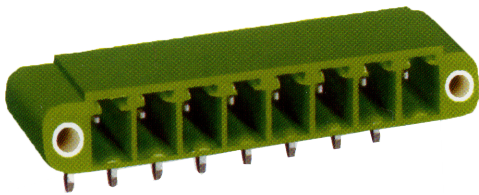


CBP1-381AR

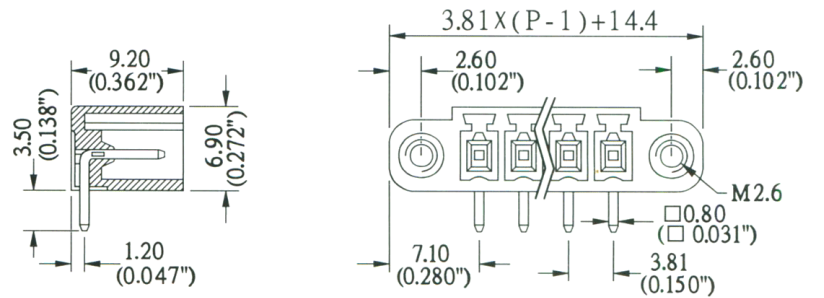

Unit : mm

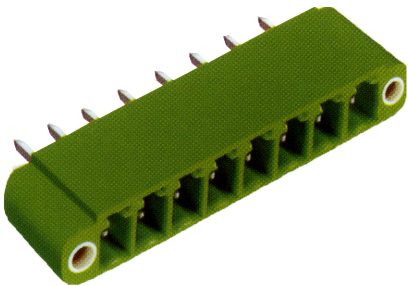

CBP1-381AV

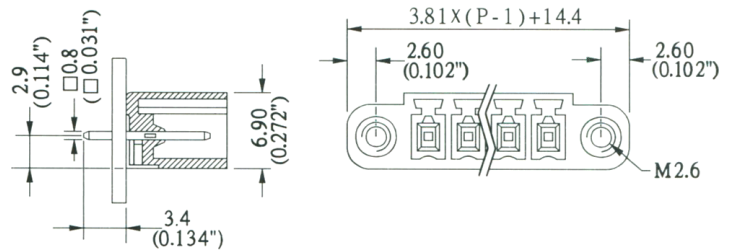


Unit : mm

CBP1-80


Made in Taiwan

Electrical Rating	10A 300VAC
Housing Material	Polyamide 66, Green
Contact	Phosphor Bronze, 0.4t, Nickel Plated
Screw	M2.6, Steel, Zinc Plated
Cage clamp	Brass, 0.7t, Nickel Plated
Solder Pin	Brass, Tin Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	24~14 AWG
Max. Torque Value	5kg/cm
Number of Poles	2P~16P
Pitch (terminal to terminal)	5mm


Unit : mm

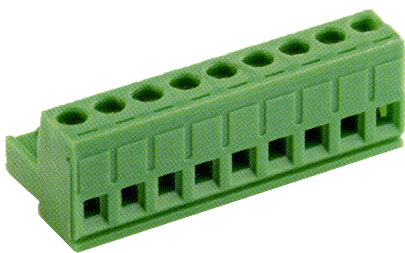

CBP1-80K

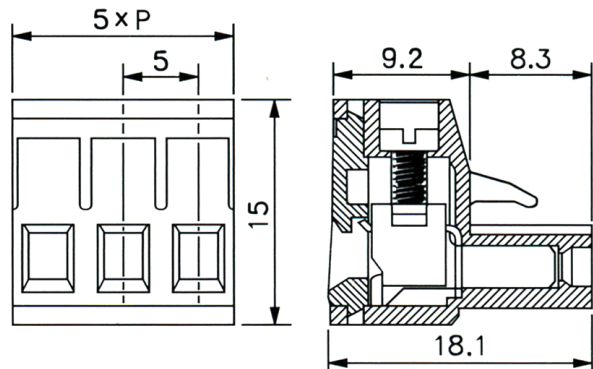

CBP1-80R

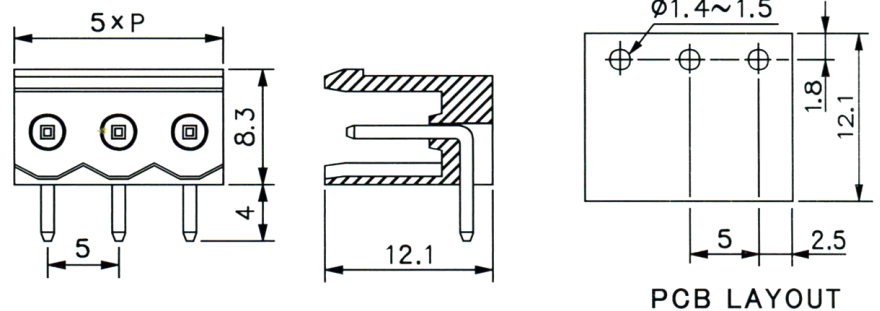


PCB LAYOUT

Unit : mm




CBP1-80V

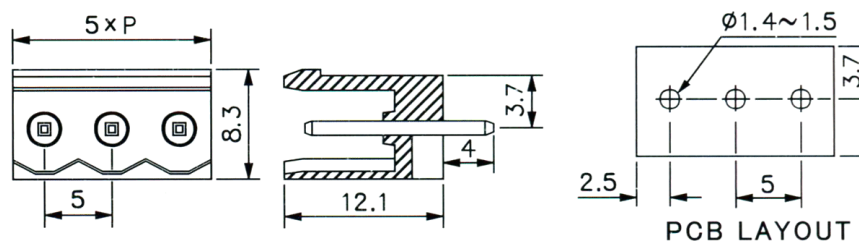


PCB LAYOUT


PCB Terminal Blocks Series

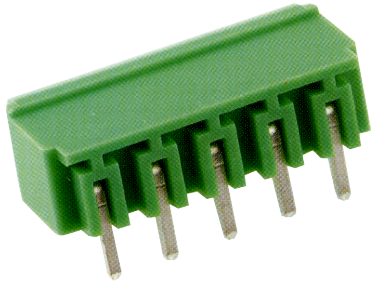


CBP1-80R1

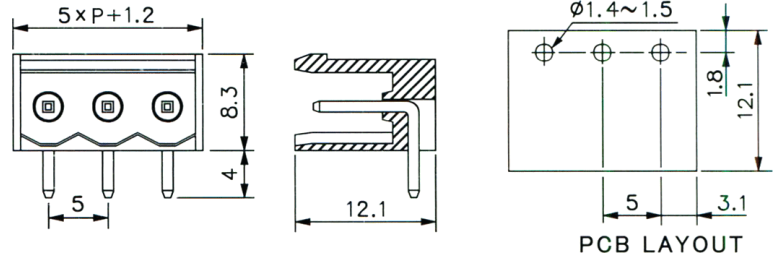

Unit : mm

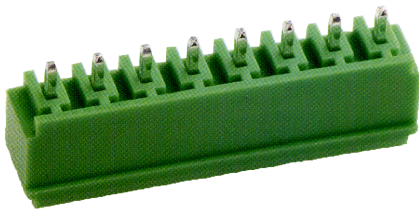

CBP1-80V1



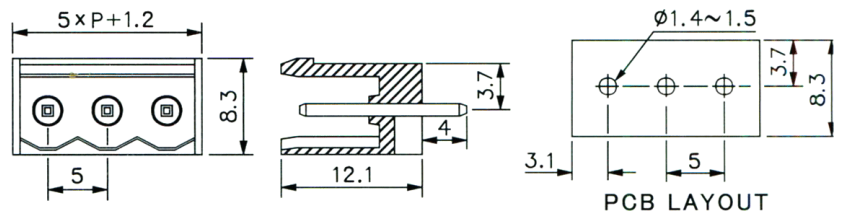


CBP2-HC381

Made in Taiwan

Electrical Rating	10A 300VAC
Housing Material	Polyamide 66, Green
Screw	M2, Steel, Nickel Plated
Wire Cage	Brass, 0.6t, Nickel Plated
Solder Pin	Brass, 0.5t, Tin Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	26~16 AWG
Max. Torque Value	2kg/cm
Number of Poles	2P ~ 16P
Pitch (terminal to terminal)	3.81mm

Unit : mm

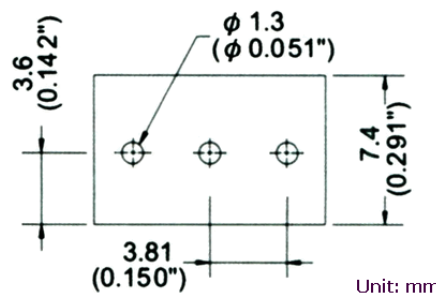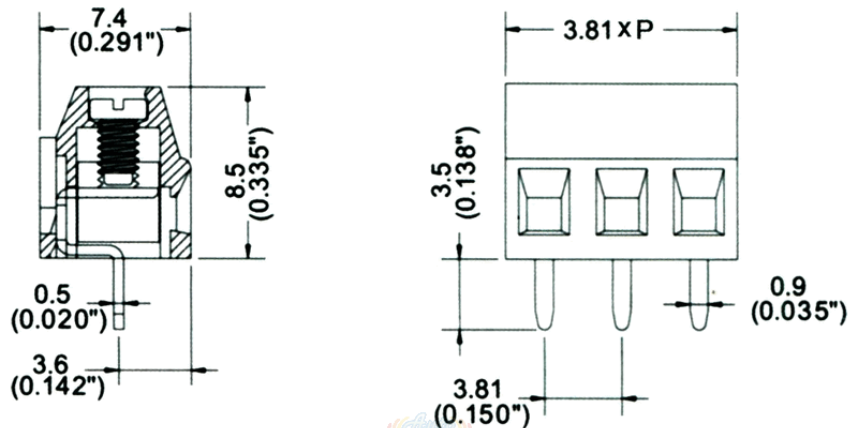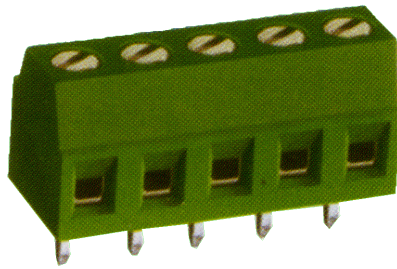

Unit: mm